
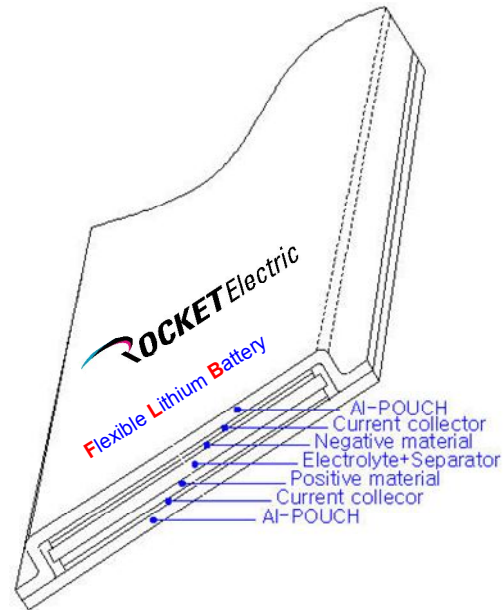


Model : FL292240

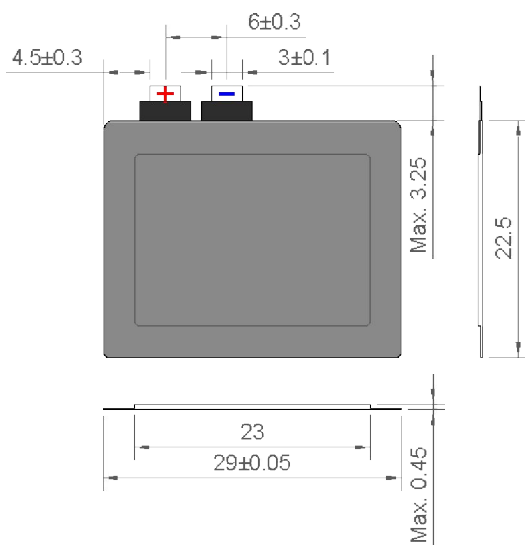

- **Chemical system** : Li / MnO_2 primary
- **Nominal voltage (V)** : 3
- **Nominal capacity (mAh)** : 12mAh @C/40(0.3mA)
- **Max. continuous discharge current** : C/10
- **Operating temperature (°C)** : -10 to 60 °C
- **Storage temperature (°C)** : -20 to 40 °C (Recommended)
- **Dimension (mm)** : W29 X L22.5 X t 0.45(max)
- **Positive / Negative terminals** : Metal strip (Al & Ni)
- **Self discharge rate** : Under 10% for 5years
- **Applications** : Security card, Smart card
RFID tag, etc.